

# F | VersiJack®

Series

Paver and Deck Support



**Creating Cities  
Where Urban Meets Nature**

## Our Innovation Your Solution

VersiJack® is an advanced generation of pedestals engineered to provide a versatile and sustainable solution to support raised pavers and decking. It improves heat and sound insulation, facilitates rapid surface drainage and creates an easily accessible chamber to conceal mechanical and electrical services. The pedestals are easy-to-use across its extensive height range allowing for an efficient and cost-effective solution.



Engineered in Australia



# VersiJack® F

VersiJack® F consists a range of eleven pedestals that extend from 37 mm to 1014 mm. It is complemented by a comprehensive list of accessories to accommodate installations of various requirements. Engineered to reduce material, construction, and lifecycle costs, VersiJack® F pedestals offer a versatile and sustainable solution for supporting raised pavers and decking.



## About VersiJack® F

VersiJack® F is a height and slope adjustable pedestal for paver and decking support engineered to reduce material, construction and lifecycle costs.

It caters to a wide range of height requirements, from 37 mm - 1014 mm, using only three main components (Top, Extender and Base).

Accessories include top and bottom slope-correctors, spacer tabs, height extenders and bearer holders.

### 1 Top Slope Corrector

Creates level surfaces by compensating for gradients up to 5%.

### 2 Pedestal Top

Designed to integrate seamlessly with all existing VersiJack® accessories.

### 3 Barrel Extender

Requires only 3 extenders to reach height of 1014 mm.

### 4 Locking Ring

Locking rings on the pedestal top and barrel extender ensure individual pedestals are secured at the desired heights.

### 5 Pedestal Base

Large contact surface provides uniform weight distribution and has drainage holes to prevent water pooling.

### 6 Dampening Pad


Self-adhesive thermoplastic foam pad protects the underlying membrane and acts as an acoustic and vibration dampening layer.

# VersiJack® Accessories




VJ Wall Spacer

VJ Wall Spacer with compressible buffer allows for expansion, contraction and paver movement.




Vertical Edge Clips

Vertical Edge Clips secure pavers upright for free fall edge installations.




Variable Angle Spacer Tab

Variable Angle Spacer Tab with rotatable posts supports up to 6 pavers.




Bearer Holder

Bearer Holder keeps battens of 35 mm to 80 mm width secured centrally on the pedestals.




Concealed Paver Retainer

Concealed Paver Retainer increases wind uplift resistance for elevated roof pavers.




Exposed Paver Retainer

Exposed Paver Retainer increases wind uplift resistance for elevated roof pavers.




Bottom Slope Corrector

Bottom Slope Corrector allows pedestals to remain upright on inclines of up to 5%.



Pedestal Shim

Allows for minor height increments, as well as providing sound and vibration dampening.




# Technical Specifications

Material	PP
Height range	37 mm to 1014 mm
Ultimate compressive strength <sup>1</sup>	13 - 18 kN (max. height)
Design compressive strength	11 kN
Slope correction	
- Top	up to 5%
- Bottom	up to 5%
Base diameter	189 mm (VJ-37FB, VJ-50FB, VJ-74FB)
	202 mm (VJ-117FB)
	226 mm (VJ-117B with bottom slope corrector)
Spacer tab post	
- Height	12 / 15 / 25 mm
- Thickness	2 / 3 / 4 / 5 / 6 / 8 / 10 mm (gap between pavers)
Bearer holder	35 mm to 80 mm (bearer width)
Biological / Chemical resistance	Unaffected by moulds and algae. Good resistance to alkali and bitumen.

<sup>1</sup> varies with different height


# Advantages

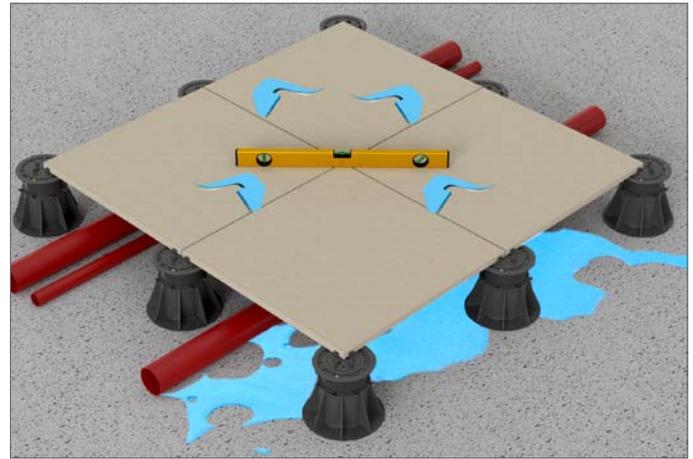

- 1 Conceals unsightly services
- 2 Rapid drainage
- 3 Quick installation with Turning Tool
- 4 Creates usable space
- 5 Ease of access
- 6 Thermal insulation
- 7 Acoustic insulation
- 8 Recyclable components



## VersiJack® F Height Table (mm)

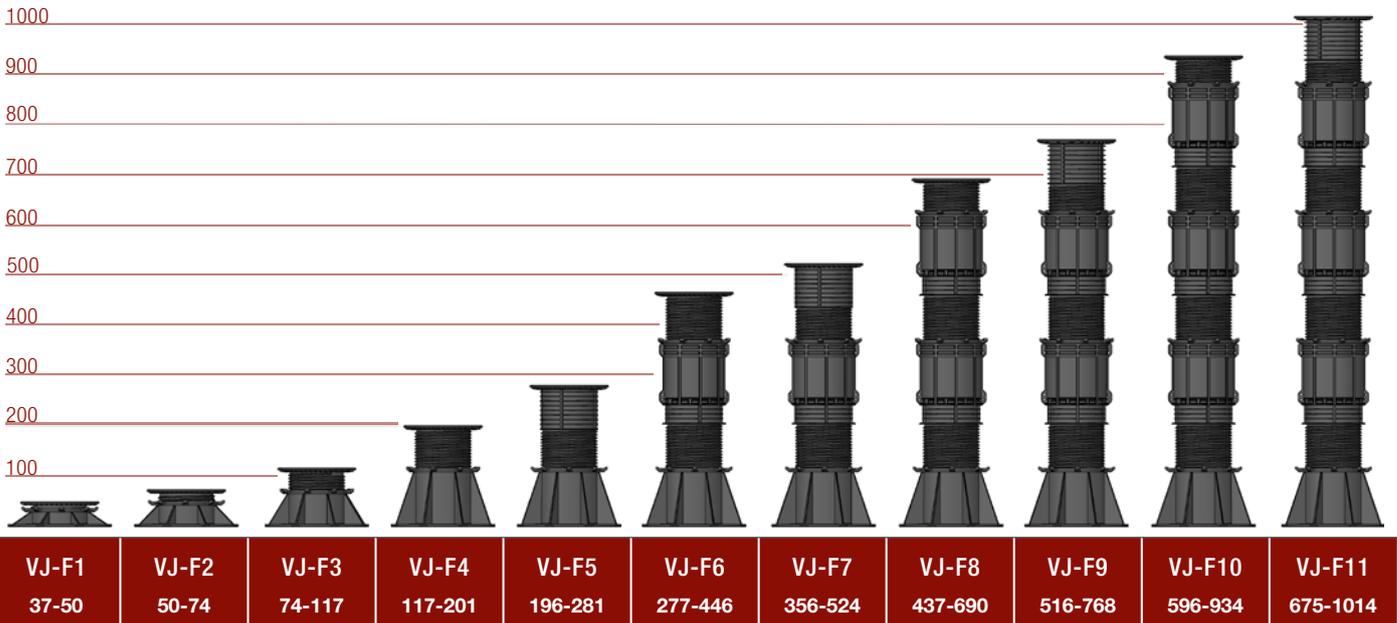

With Bottom Slope Corrector\*

VJ-S0	VJ-S1	VJ-S2	VJ-S3	VJ-S4	VJ-S5	VJ-S6	VJ-S7
125 - 209 mm	204 - 289 mm	285 - 454 mm	364 - 532 mm	445 - 698 mm	524 - 776 mm	604 - 942 mm	683 - 1022 mm

VersiJack® is part of our Paver & Deck Support range of adjustable Elmich pedestals (4 mm - 1022 mm)



The Elmich security hologram ensures authenticity of the products.

**Distributed by:**

**Note:** The information provided in this brochure is based on current knowledge and experience and does not infer any legally binding assurance or warranty, expressed or implied. Intending purchasers should verify whether any changes to specifications or applications or otherwise have been made since the issue of this literature. Environmentally-friendly recycled materials are used in product manufacture wherever possible. Physical product properties including colour may differ due to source of raw materials used. Colour may also fade due to UV exposure. All components of the product are designed for specific application, design calculations and any variation and/or deviation therefrom shall be the responsibility of the specifier and/or user.